



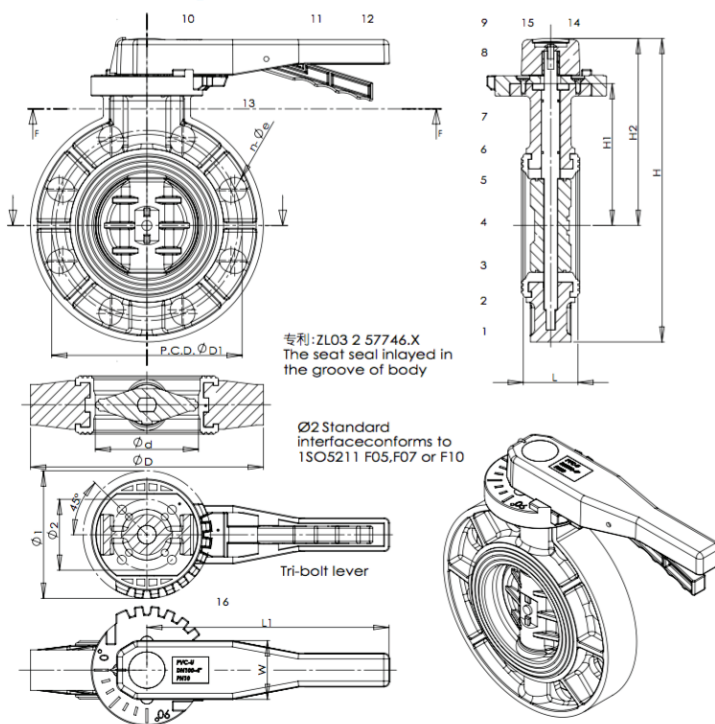

- 

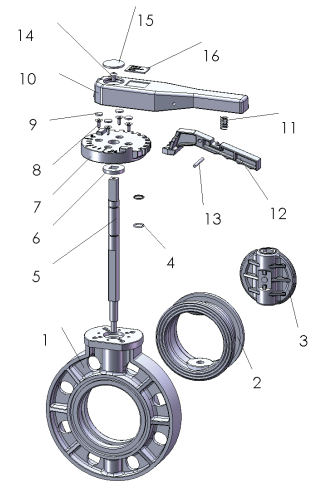

| No. | Description     | Material |
|-----|-----------------|----------|
| 1   | body            | UPVC     |
| 2   | seat seal       | EPDM     |
| 3   | disc            | UPVC     |
| 4   | o-ring          | EPDM     |
| 5   | stem            | 420      |
| 6   | locking block   | UPVC     |
| 7   | indicator plate | ABS      |
| 8   | bolt            | STEEL    |
| 9   | bolt cover      | ABS      |
| 10  | handle          | ABS      |
| 11  | spring          | SS304    |
| 12  | lever           | ABS      |
| 13  | pin             | STEEL    |
| 14  | bolt            | STEEL    |
| 15  | mark cap        | ABS      |
| 16  | logo plate      | ABS      |

| Size       | 2"      | 2 1/2"  | 3"      | 4"      | 5"      | 6"      | 8"      |
|------------|---------|---------|---------|---------|---------|---------|---------|
| Ød         | 160     | 180     | 196     | 228     | 258     | 287     | 344     |
| P.C.D.,ØD1 | 125     | 145     | 160     | 180     | 210     | 240     | 295     |
| Ød         |         | 63      | 78      | 98      | 122     | 146     | 199     |
| L          | 43      | 46      | 49      | 54      | 64      | 70      | 88      |
| Ø1         | 124     | 124     | 142     | 124     | 170     | 170     | 170     |
| Ø2         | 1S05211 | 1S05211 | 1S05211 | 1S05211 | 1S05211 | 1S05211 | 1S05211 |
| LI         | 190     | 190     | 240     | 240     | 310     | 310     | 310     |
| W          | 55      | 55      | 55      | 55      | 72      | 72      | 72      |
| H1         | 100     | 112     | 120     | 140     | 168     | 181     | 215     |
| H2         | 143     | 155     | 172     | 194     | 223     | 239     | 280     |
| H          | 223     | 245     | 270     | 308     | 352     | 382     | 452     |
| n-Øe       | 4-Ø19   | 4-Ø19   | 8-Ø19   | 8-Ø19   | 8-Ø19   | 8-Ø23   | 8-Ø23   |
| MPa        | 1       | 1       | 1       | 1       | 1       | 1       | 0.6     |
| Weight,Kg  | 1.13    | 1.35    | 1.5     | 2.4     | 4.2     | 4.75    | 7.6     |
| Torque.N.M | <10     | <10     | <15     | <25     | <40     | <55     | <70     |